

MRL Medical Elevator

Hoistway Structure

Concrete Brick & Concrete Other

Unstandard Standard

NOTE

				Technical Requirement:							
HW	HOISTWAY WIDTH	CW	CAR INSIDE WIDTH	Type	TKJW 1600 / 1.0-VF						
HD	HOISTWAY DEPTH	CD	CAR INSIDE DEPTH	F/P/D	/ / /	Door type	Side open				
OP	DOOR OPENING WIDTH	CH	CAR HEIGHT	load	1600	kg	speed 1.0 m/s				
ROP	WALL OPENING WIDTH	MRW	MACHINE ROOM WIDTH	Machine	MCK300	Roping	2:1				
OPH	DOOR OPENING HEIGHT	MRD	MACHINE ROOM DEPTH	T/sheave	φ 4.00	D/sheave	φ				
OH	OVERHEAD HEIGHT	MRH	MACHINE ROOM HEIGHT	car sheave	φ 4.4.0	CW sheave	φ 4.00				
CAR DBG	DISTANCE BETWEEN CAR GUIDE RAILS			Shaft	HW 2400	mm x HD 3100	mm				
CWT DBG	DISTANCE BETWEEN COUNTERWEIGHT GUIDE RAILS			Cabin	CW 1400	mm x CD 2400	mm				
				Door	OP 1100	mm x OPH 2100	mm				
				Speed	1.0	1.5	1.75 (m/s)				
				Power	11	16.6	19.4 (kw)				
				OH	≥4.600	≥4.700	≥4.700 (mm)				
				Pit	≥1600	≥1700	≥1700 (mm)				
				current			(A)				
				380V 3phase 5wire, 50Hz, fluctuation ±7%							
				Support Force (N)							
				R1	R2	R3	R4	P1	P2	P3	P4
				39600	56500			128000	96000		

Technical Requirement

1. Power supply: machine room need equipped with power supply. Power supply box need be locked. Power supply should be 3P.5 wires, 380V 50Hz. Voltage tolerance ±7%, input power more than 50% of motor power, also equipped with air switch same capacity with power supply, also allow the supplement leakage protector. When use VVVF, need use special leakage switch. Ground resistor should be < 4Ω. It should use insulated conductor from floor to machine room. Keep separate for null wire and ground wire.

2. Shaft requirement, it should be only for lift, can not install non-related device (pipe, cable, etc), and should keep the person entrance into. The shaft plan size mean the min size measured by plumb line, tolerance ±50mm. Basically not allow the protruding beam and column. The proof pressure of shaft side should be > 24MPa. Recommend to use full concrete, can not use the reserved steel. In case use solid brick, it should use reserved steel or make the ring beam on the surface of reserved steel, height > 300mm. If use hollow brick, can choose C25 concrete fill into the wall, also make the ring beam on the surface of reserved steel, height > 300mm. If the shaft front wall is brick construction, it should make the concrete beam up side of door hole to fix the landing door bracket, height > 300mm. If have the requirement in the drawing, it should make the concrete in the entrance of hall door. It should equipped with lamp, brightness > 50LX, install the lamp at 0.5m from the top and the bottom, in the middle, each lamp at < 5m. The buffer block should be made accompany with special person. Before that need make the reserved 24-24 joint bar > φ12mm, height > 500mm from the pit floor, and should water proof. Keep the space for person entrance. Pit ladder is by user. Should installed it in a suitable place. If there have basement downside of the pit should make the buffer block extend to the solid floor downside. If the floor distance between 2 floor > 1m, should set the safe door with the width 350mm, height 1800mm.



3. Machine room requirement (not for MRL). It had the passageway for the traction machine. keep the entrance unblocked. the door opens outward, also can be locked.

16 F. Installed the fan, keep the humidity < 85%, temperature +5C-40C, surrounding the reserved hole should make the 50mm hole, keep the floor plan, also bear the load 700kg/m².

13 F. The not or beam should be supported in the concrete block, this concrete block should extend to the building beam or bearing wall. Bearing side should make the reserved same side steel. thickness 2mm, bearing side thickness should over the wall thickness 20mm, total thickness more than 75mm.




9 F. Standard wall 200mm, recommend the bearing wall thickness > 200mm.

8 F. The hook in the machine room should indicate the max. load. It should install the ladder and barrier in case have stair.

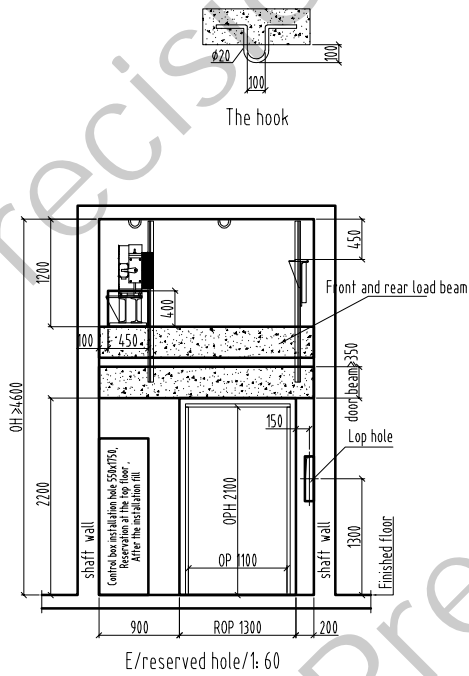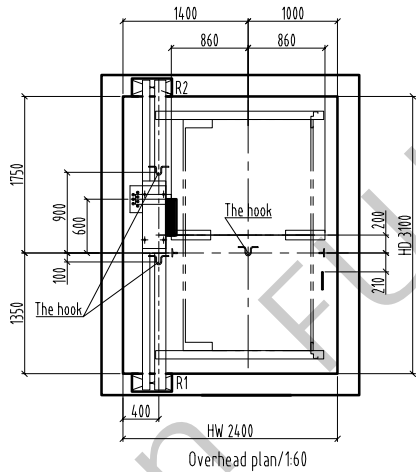

The other side door hole is symmetrically reserved according to E to the door hole

Bottom box Lop: 100x500 (base station) 100x400 (remaining stations)
No bottom box Lop hole: φ50 hole

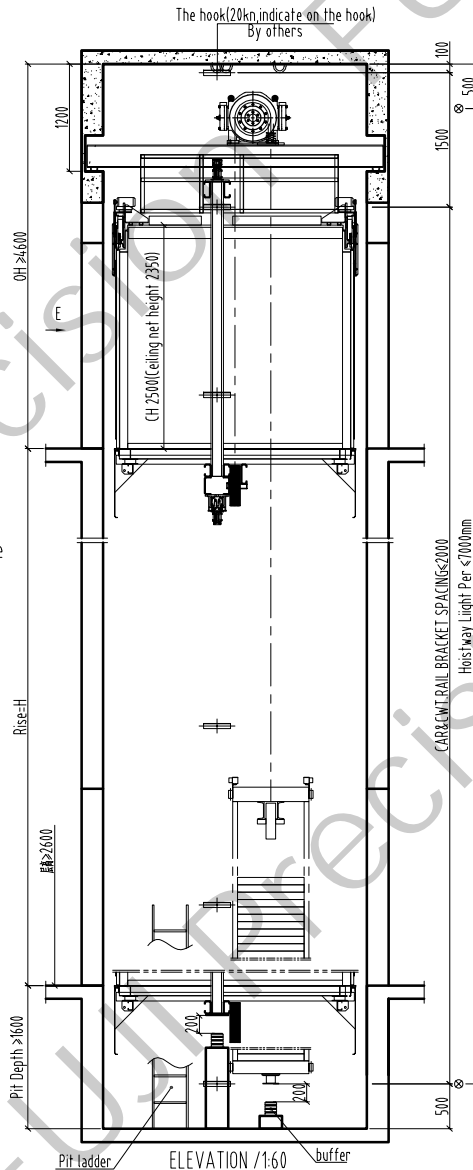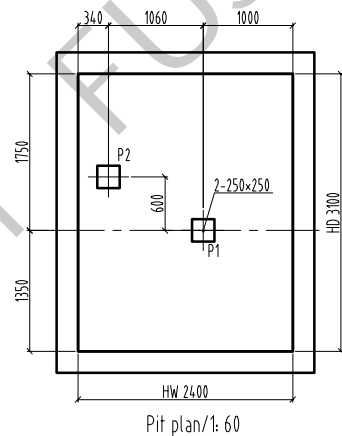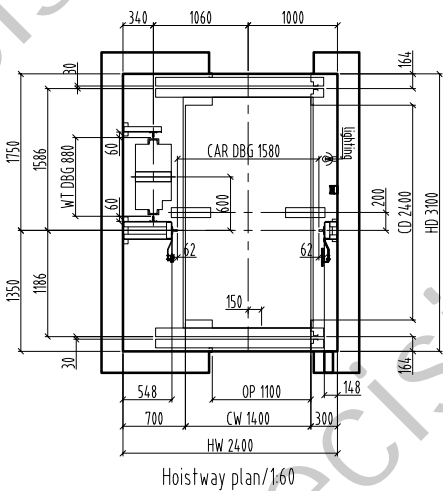

OH Rise	H
OH	≥4600
Rise	H
26 F	
25 F	
24 F	
23 F	
22 F	
21 F	
20 F	
19 F	
18 F	
17 F	
16 F	
15 F	
14 F	
13 F	
12 F	
11 F	
10 F	
9 F	
8 F	
7 F	
6 F	
5 F	
4 F	
3 F	
2 F	
1 F	
G F	
B F	
Pit	≥1600
Floor	Height

Drawing	approver
Drawing No.	FTKW 1600 -02-
manufacturing no.	
Project name	
FUJI PRECISION	